





## Static Light Daylight Par 575 V2

### Specification

- > **Output 575w**
- > **Lamp Type MSR575/2 or Equivalent**
- > **Colour Temperature > 7200 kelvin**
- > **Efficiency (%) 95 @ 230v**
- > **High Frequency Electronic 300khz**
- > **Clearer Image Projections**
- > **Flicker Free**
- > **Fanless Ballast**
- > **Reduced Heat Output**
- > **Silent Running**
- > **Soft Start Extending Lamp Life**
- > **Fewer Parts Increased Reliability**
- > **Multi Voltage 90-260v**
- > **Variable Focus Lamp Optimization**
- > **ETC Aluminium Optic**
- > **Quick Change Lamp Housing**
- > **Multiple Lens & Attachment Options**
- > **Ballast Onboard**
- > **No Additional Special Cabling or Remote Ballasts**
- > **Built to / Conforms to the following Specifications**  
**EN55022 CISPR22 Class A, EN61547 (1996) , EN61347**  
**EN61000-3-2 , 89/336/EEC , CE 73/23/EEC**  
**UL 60598-1-1993 UL 60598-17-1989 UL 1029**



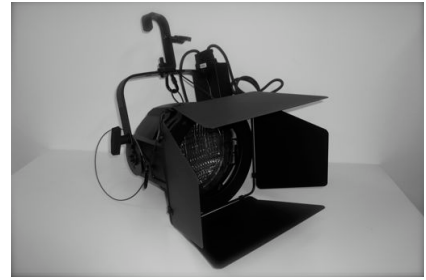

## Static Light Daylight Par 150w V2

### Specification

- > **Output 150w**
- > **Lamp Type G12 Ceramic or Equivilent**
- > **Colour Temperature > 3000-6500k kelvin**
- > **Efficiency (%) 95 @ 230v**
- > **High Efficiency Electronic Ballast**
- > **Clearer Image Projections**
- > **Flicker Free**
- > **Fanless Ballast**
- > **Reduced Heat Output**
- > **Silent Running**
- > **Soft Start Extending Lamp Life**
- > **Fewer Parts Increased Reliability**
- > **Voltage 200-265v**
- > **ETC Aluminium Optic**
- > **Quick Change Ballast**
- > **Quick Change Lamp Housing**
- > **Multiple Lens & Attachment Options**
- > **Ballast Onboard**
- > **No Additional Special Cabling or Remote Ballasts**
- > **Built to / Conforms to the following Specifications**  
**EN61000-3-2 , EN61547 , EN55015 , EN61347-1**  
**EN61000-4-5, EN61347-2-3, EN61347-2-12**  
**UL 60598-1-1993 UL 60598-17-1989 UL E252260**





## Static Light Daylight Profile 150w V2

### Specification

- > **Output 150w**
- > **Lamp Type G12 Ceramic or Equivilent**
- > **Colour Temperature > 3000-6500k kelvin**
- > **Efficiency (%) 95 @ 230v**
- > **High Efficiency Electronic Ballast**
- > **Clearer Image Projections**
- > **Flicker Free**
- > **Fanless Ballast**
- > **Reduced Heat Output**
- > **Silent Running**
- > **Soft Start Extending Lamp Life**
- > **Fewer Parts Increased Reliability**
- > **Voltage 200-265v**
- > **ETC Dichroic Optic**
- > **Quick Change Ballast**
- > **Quick Change Lamp Housing**
- > **Multiple Lens & Attachment Options**
- > **Variable Focus Control**
- > **No Additional Special Cabling or Remote Ballasts**
- > **Built to / Conforms to the following Specifications**  
**EN61000-3-2 , EN61547 , EN55015 , EN61347-1**  
**EN61000-4-5, EN61347-2-3, EN61347-2-12**  
**UL 60598-1-1993 UL 60598-17-1989 UL E252260**

