



# DATASHEET

# Titan PowerBox

Compatible with:  
FP1 Titan Tube, FP2 Helios Tube, PB15 PixelBrick

Date: 01/28/21 Version: 1.0



Power supply for charging 8 Titan Tubes or Helios Tubes at the same time. Also works as a converter for DMX, Art-NET and sCAN. Including 1 Powercon True1 cable and 8 short DC cables.

### In the box

- 1 x Power supply box
- 8 x DC power cords
- 1 x PowerCon True1 AC cable



### Accessories

- Power Data Combination Cables
- 5m: FP1-PWB-CAB-5
- 10m: FP1-PWB-CAB-10
- 15m: FP1-PWB-CAB-15

## SPECIFICATIONS

Order Code EU	FP1-PWB-EU
Order Code US	FP1-PWB-US
Order Code UK	FP1-PWB-UK
Order Code CH	FP1-PWB-CH
Order Code AU	FP1-PWB-AU
Input	90~250VAC
Input Current	4.4A@115VAC, 3A@230VAC
Output	10 x 24V/2A
Output Connectors	10x DC Barrel 5.5/2.1mm
Power IN / Power OUT	PowerCon True1
Data Input	XLR-DMX; ART-Net (1 Universe); sACN (1 Universe) IP Address can be selected between 2.x, 10.x and DHCP. Universe ID can be set by web-interface or pushbutton (by button only 1-16).
Data Output	DMX via DC sockets
Data sockets	5-pin XLR in+out; RJ45 input
IP Rating	IP20
Dimensions (mm/inch)	321 x 90.7 x 125/ 12.6 x 3.6 x 4.9
Weight (kg/lbs)	3.8 / 8.37
Material	Aluminium

## DRAWINGS

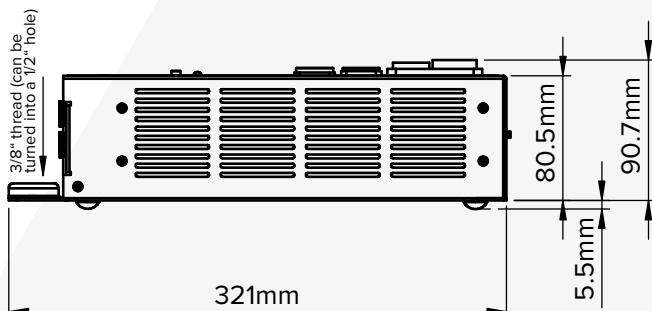


## USE CASE

### PowerBox in the set



# CHARGING & CONNECTING

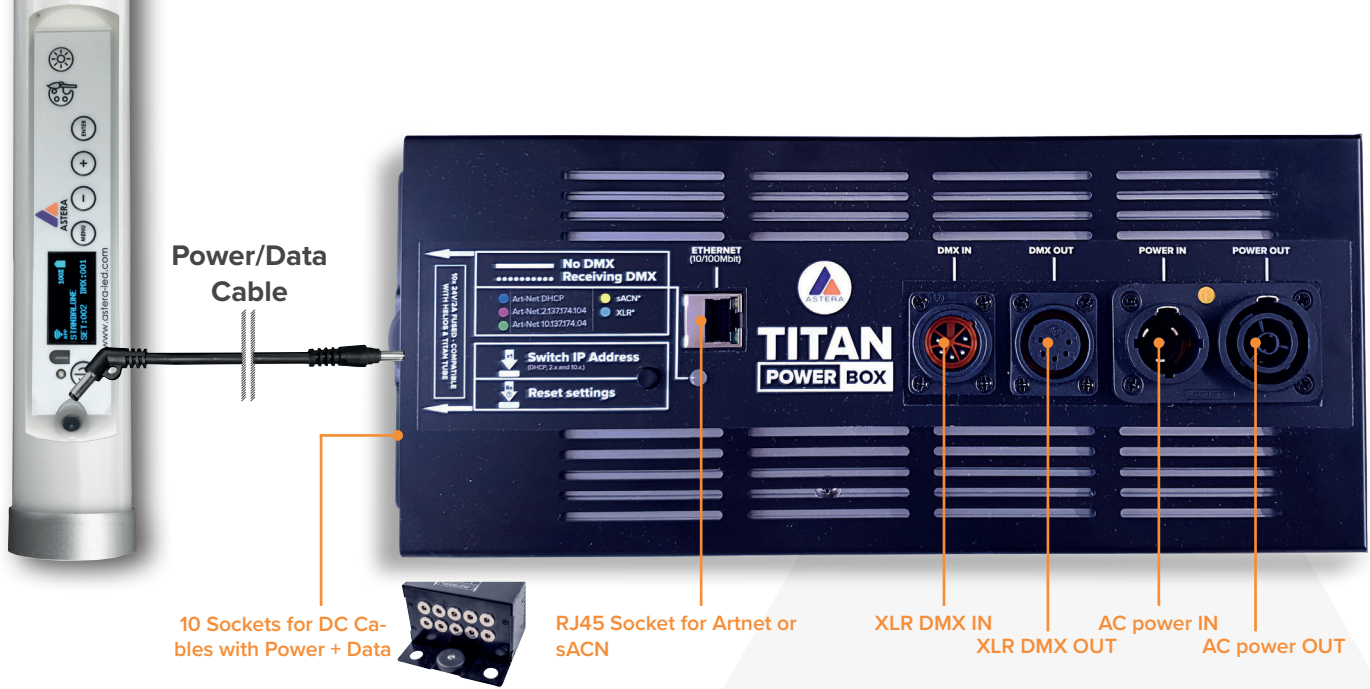

# CONNECTING MULTIPLE DMX UNIVERSES TO 1 POWERBOX

