


# CM Special Theatrical Alloy Chain (STAC)

For theatrical rigging applications where bridel adjustability is required

- Super strength with working load limits of 12,000 lbs.
- Heat treated alloy steel provides long life
- Fireproof and abrasion resistant
- 4:1 design factor meets N.A.C.M./GR80 standards for strength
- Each link proof tested to assure weld and material integrity
- Chain embossed with STAC and CM for easy identification as CM alloy
- Tagged with size, grade, reach and working load limit for positive easy identification
- Link accepts shackle up to 3/4" for versatility and adjustability

.5750 lbs. per link  
1.84 lbs. per foot

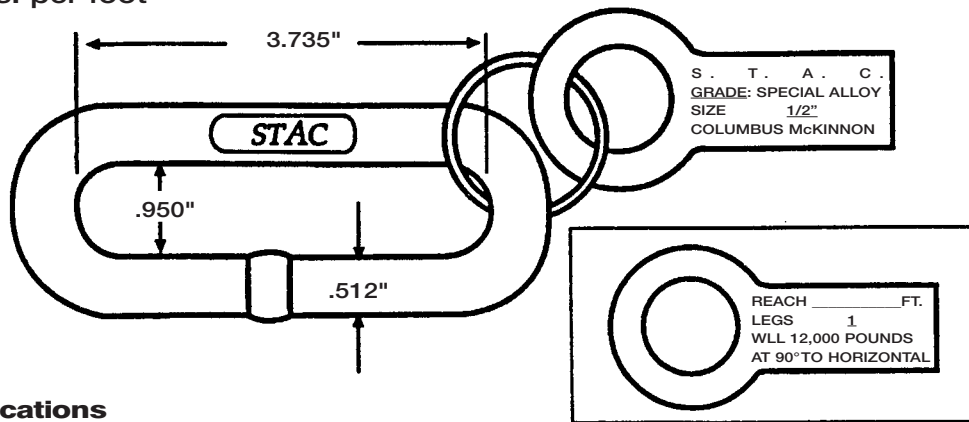


## Specifications

Product code	Size (in.)	Length (ft.)
695575	1/2	3
695576	1/2	4
695577	1/2	5
695578	1/2	6
695579	1/2	7
695580	1/2	8
695581	1/2	9
695582	1/2	10
695583	1/2	11
695584	1/2	12
695585	1/2	13
695586	1/2	14
695587	1/2	15

Note: Special lengths available upon request

BACK OF TAG

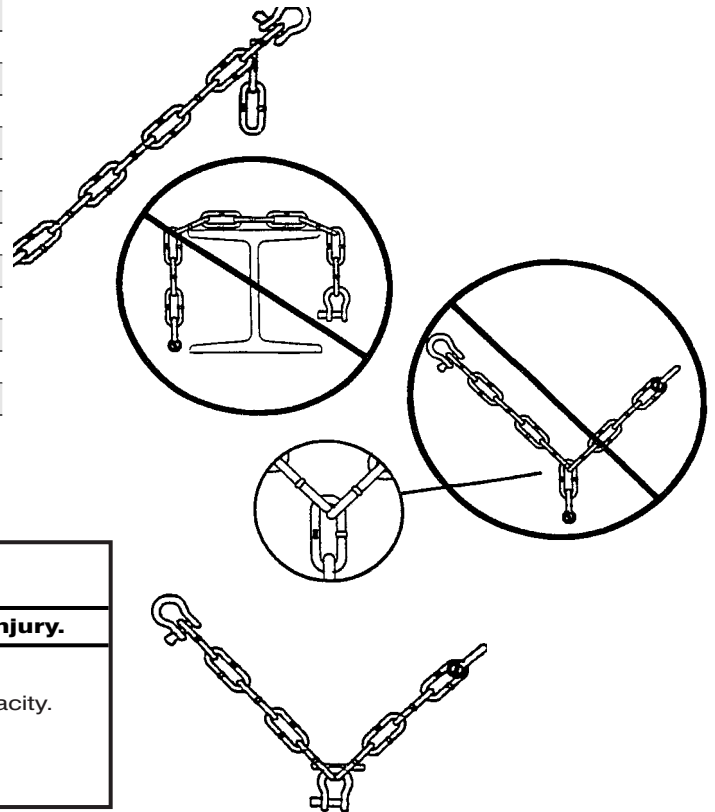

## \* ⚠ WARNING

Overloading and improper use can result in injury.

### To avoid injury:

- Do not exceed working load limit, load rating or capacity.
- Do not use to lift people or loads over people.
- Use only alloy chain for overhead lifting.
- Read and follow all instructions.